

Product Sales Sheet


# Ultra-Turf Tile & dB-Turf Tile

Ultra-Turf Tile and dB-Turf Tile feature a dense, textured nylon wear layer fusion molded to a vulcanized composition layer. While too abrasive to fall or dive on, this consistent and tight surface is ideal for speed & functional training. Ultra-Turf Tile is an ideal match to UltraTile, while dB-Turf Tile (decibel) is an ideal acoustic match to SmashTile.

Ultra-Turf Tile



dB-Turf Tile

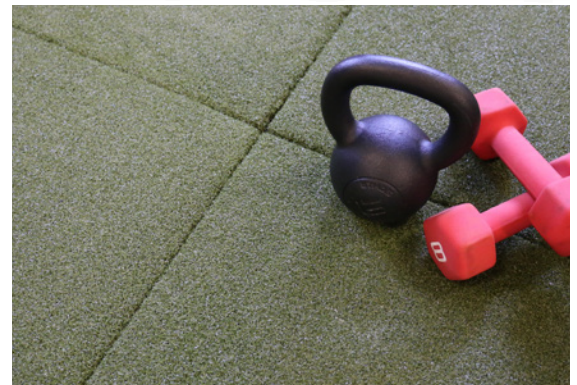

## Markets

- Fitness
- Sports
- Student Rec

## Applications

- Light Weights
- Moderate Weights
- Functional Training
- Extreme Functional Training

## Benefits

- Durable
- Sustainable
- Ease of Maintenance
- Slip-Resistant
- Easy installation with QuadBlok installation system

## Product Options:

### Ultra-Turf Tile Size:

Available as a standard in tiles.



Tile:  
1" x 24" (61cm) x 24" (61cm)



Reducers:  
4" (102mm) x 48" (1.22m)  
Thickness: 1" (25.4mm)



ADA Ramp:  
12" (305mm) x 48" (1.22m)  
Thickness: 1" (25.4mm)



Quad Blok:  
½" H x 4 ¾" x 4 ¾"  
Adhesive = 1 Tube / 15 Quad Bloks

### dB-Turf Tile (decibel) Size:

Available as a standard in tiles.



Tile:  
2.5" x 24" (61cm) x 24" (61cm)



Reducers:  
8" (203mm) x 48" (1.22m)  
Thickness: 2.5" (63.5mm)



ADA Ramp:  
64" (1625mm) x 30" (762mm)  
Thickness: 2.5" (63.5mm)



Quad Blok:  
17" H x 8" x 8"  
Adhesive = 1 Tube / 10 Quad Bloks

## Technical Details

Performance Criteria	Test Standard	Typical Results
Lead Content	ASTM D2765	< 50 ppm
Total Yarn Linear Density	ASTM D1577	4,200 Denier
Yarn Breaking Strength	ASTM D2256	> 19 lbs
Yarn Melting Point	ASTM D7138	428°F
Flammability	ASTM D2859	Pass
Coefficient of Friction	ASTM C1028	0.78 Dry



68.2%

49.6%

**Force Reduction**  
Absorption of impact energy



44.7%


45.2%

**Energy Restitution**  
Useful return of impact energy

dB-Turf Tile

Ultra-Turf Tile

Values based on Deltac Test, 5mm.



Can a floor  
do more?  
Yes.