# Product Options

22.5mm (2.5mm+8mm/12mm) x 48" (1.2m)

# Physical Data

| PERFORMANCE CRITERIA | TEST | RESULT |
|---|---|---|
| Tensile Strength | ASTM D 412 | 200 PSI min |
| Flexibility ¼" mandrel | ASTM F 137 | Pass |
| Thermal Conductivity | ASTM C 518 | 1.3 Btu-in/h-ft-F |
| Coefficient of Friction | ASTM D 2047 | > 0.8 |
| V.O.C. Compliant | ASTM D 5116 | Yes |
| Abrasion Resistance | ASTM D 3389 / EN 649 | <1g, 1000 cycles |
| Pill Test | ASTM D 2859 | Pass |
| Standard Vertical Deformation | ASTM F 2772 | 1.6mm Pass |
| Surface Effect Slip Resistance | ASTM F 2772 | 92 |
| Ball Rebound | ASTM F 2772 | 100% Pass |
| Force Reduction | ASTM F 2772 | 40% Pass |
| Rolling Load | EN1569 | Pass |
| Impact | EN1517 | 0.0mm |
| Indentation | EN1516 | 0.1mm |

everlastsportsfloors.com.au | 03 9357-5354

# Can a floor sustain endless sets of power cleans and help your legs survive endless box jumps?

Yes.

## Stacked Performance Monster

is a 22.5mm triple durometer system designed for extreme strength and conditioning. This system features a 10.5mm Beast Roll field united to a 12mm ShockPad.

ecore™ | Built by Yes.

## What does it take to be a floor?

- ☑ Durable
- ☑ Sustainable
- ☑ Affordable
- ☑ Ease of Maintenance
- ☑ Slip Resistant

With a durable wear layer made from vulcanized EPDM rubber, this product resists the scuffing and marking that is common in strength and conditioning applications.

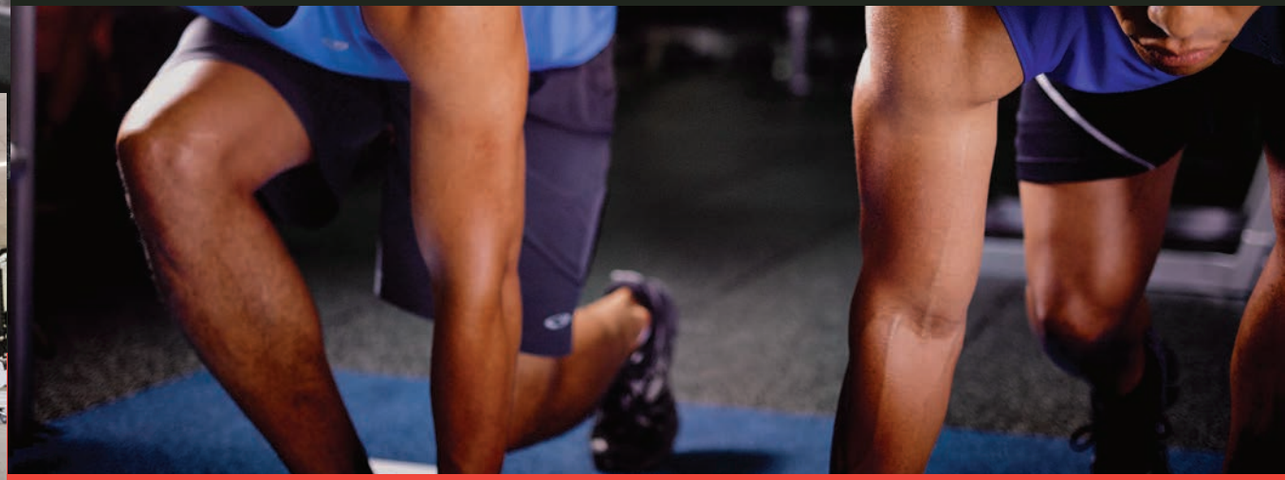

## Applications

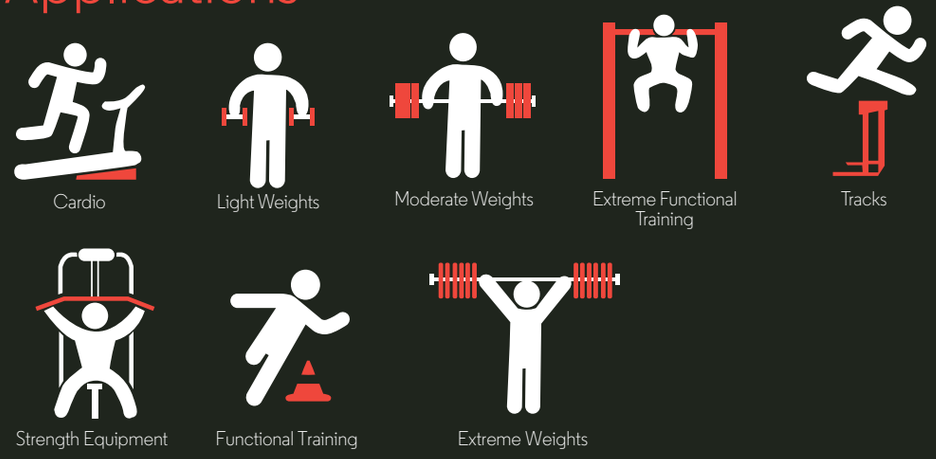


## Can a floor do more? Yes.
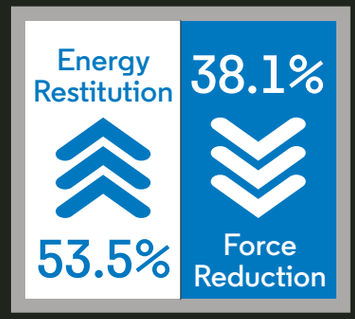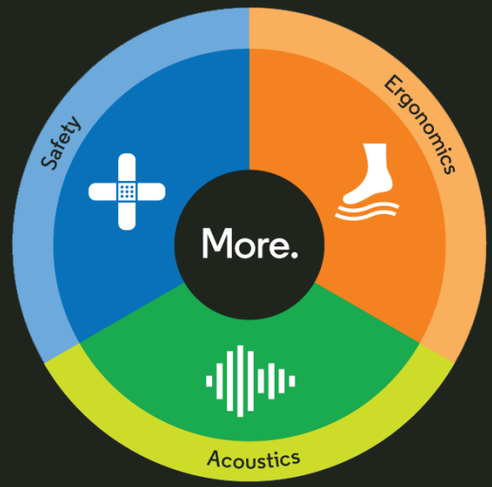
This triple durometer system combines the durability and firm footing desired in strength training with the ergonomic demands of aggressive functional training in one surface.