


BL46

Sports Underlayment

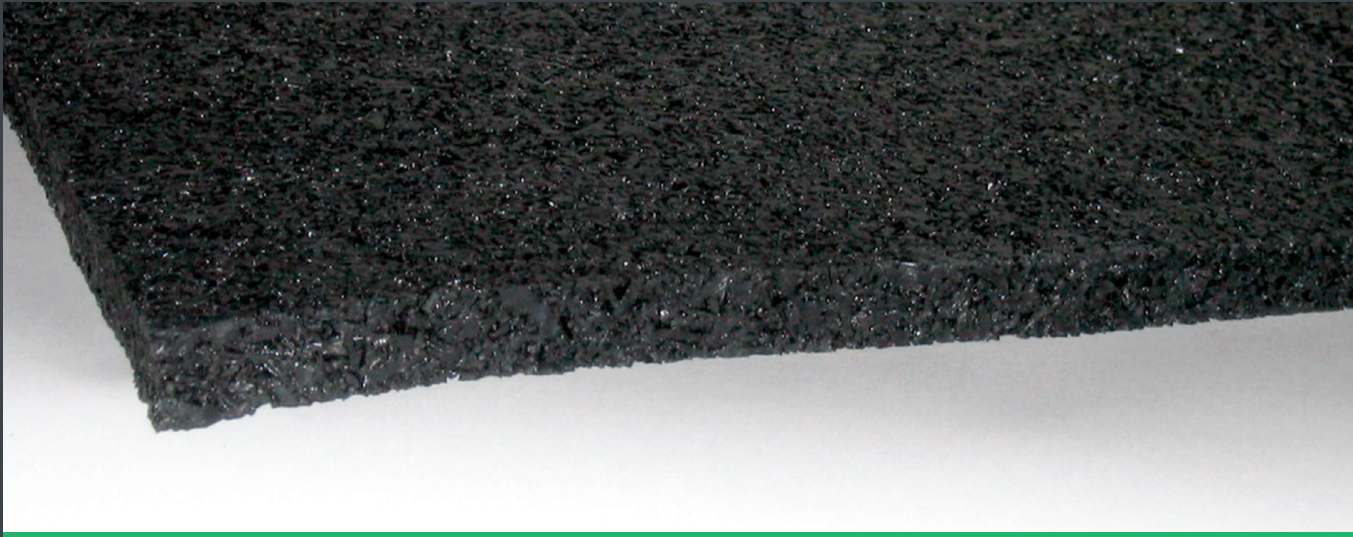


Our recycled rubber sports underlayments deliver high performance and superior durability for nearly all sports applications. Underlayments can be paired with track surfacing, courts, or with other resilient wear layers to provide comfort, force reduction, and sound absorbency* and are easy to install in the field. Our recycled rubber underlayments exceed DIN standards without sacrificing the environment.

*Ecore sports underlayments can help mitigate sound. However, if IIC ratings are necessary, Ecore's patented and tested QT sound control may be the best fit. www.qtsoundcontrol.com.

Available In

| Thickness | Width | Roll Length |
|-----------|-------|-------------|
| 4mm | 59" | 82 feet |
| 5mm | 59" | 82 feet |
| 6mm | 59" | 82 feet |
| 7mm | 59" | 82 feet |
| 9mm | 59" | 82 feet |

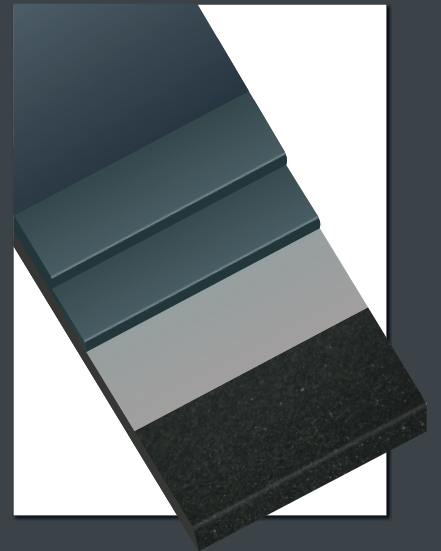

Physical Data Test

| Property | Test Method | Typical Results |
|--------------------------------------|------------------|----------------------------|
| Density | ASTM D297 | 45 lbs/ft ³ min |
| Tensile Strength (machine direction) | ASTM D412, Die C | 90 psi |
| Elongation | ASTM D412, Die C | 50% |
| Tear Strength | ASTM D624, Die C | 30 ppi |
| Shore A Hardness | ASTM D2240 | 45 |